


Activated carbon filter cartridge

We produce and supply filter cartridges with bayonet closing. The galvanized perforated plate packaging is a refillable. On the input, there is a PE seal.

Technical data

Dimension outside diameter (mm)	145	145
Dimension height (mm)	453	600
Finish	Galvanised or Stainless Steel	Galvanised or Stainless Steel
Activated Carbon Weight (kg)	2,1	3
Thickness of carbonbed (mm)	26	26
Installation	bajonet	bajonet
Max. operation Temperature (°C)	80	80
Max. relative humidity air (%)	70	70
Recommended Max. hydrocarbon output (m ³ /h)	156	200
Contacttime at max. output (s)	0,1	0,1
Mounting option	G16, G12, G8, G4	G16, G12, G8, G4

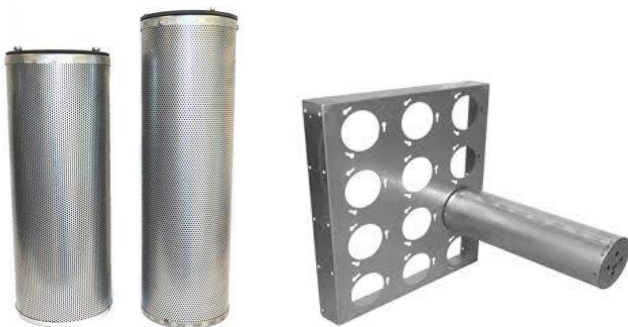

Telefon: +420 577 341 305

Mobil: +420 603 101 614

E-mail: ekofiltr@ekofiltr.cz

Divnice 134

763 21 Slavičín - Prům. areál

IČ: 45467587 | DIČ: CZ45467587



Jsme držitelé certifikátů

ISO 9001a ISO 14001