


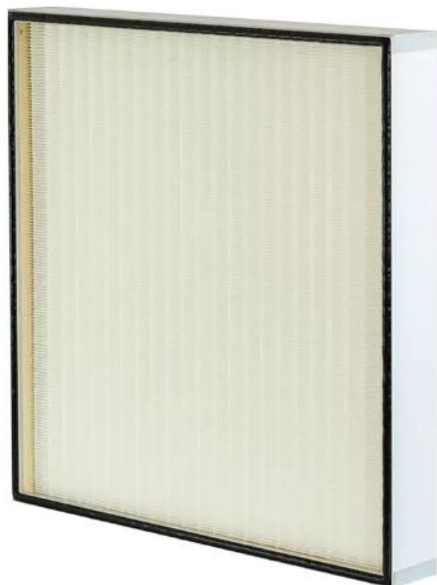

PRODUCT INFO:

- **Type of frame:** MDF, galvanized sheet metal, plastic, AL sheet, AL profile
- **Type of medium:** fiber glass
- **Media color:** white
- **Available versions:** minipleat (pleat height 20 – 200 mm)
Al separators (frame depth 150 - 292 mm)
- **Type of seal:** flat, half-round, double-lip, gel gasket
- **Operating temperature:** max. 70 °C
- **Recommended final pressure drop:** 450 Pa
- **Disposal:** can be disposed of in incinerators or municipal waste landfill
- **Warranty:** valid for the entire service life of the filter:

GENERAL DESCRIPTION:

- **Application:** areas with the highest requirements for air cleanliness (microelectronics, semiconductor manufacturing, healthcare, chemical industry, pharmaceuticals, microbiology, production, etc.)
- Filters are tested for integrity using the oil mist leak test.
- **SCAN test on request.**



ABSOLUTE HEPA FILTER H13 (EN 1822)

Product	Width (mm)	Height (mm)	Depth (mm)	Minipleat (mm)	Filter surface (m ²)	Airflow (m ³ /h)	Initial Pressure drop (Pa)	Recom. final diff. pressure (Pa)
305x305x78	305	305	78	50	1,7	260	250	450
305x610x78	305	610	78	50	3,7	560	250	450
457x457x78	457	457	78	50	4	600	250	450
610x610x78	610	610	78	50	7,5	1120	250	450
305x305x150	305	305	150	80	2,2	325	250	450
457x610x150	457	610	150	80	7,6	1140	250	450
915x610x150	915	610	150	80	16	2450	250	450
305x610x292	305	610	292	120	6,3	820	250	450
610x610x292	610	610	292	120	12,7	1670	250	450