


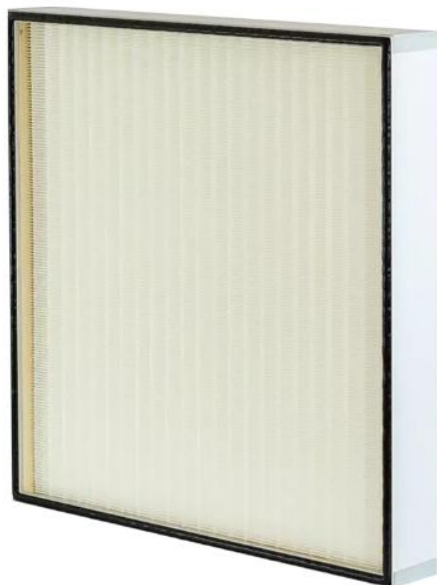

PRODUCT INFO:

- **Type of frame:** AL profile (other materials on request)
- **Type of medium:** fiber glass
- **Media color:** white
- **Available versions:** minipleat (pleat height max. 100 mm)
- **Type of seal:**
 - Half-round (PUR) for frame depths of 68, 78, 90 and 117 mm
 - Gel seal for frame depths of 80, 102, 104 and 128 mm
- **Operating temperature:** max. 70 °C
- **Recommended final pressure drop:** 450 Pa
- **Disposal:** can be disposed of in incinerators or municipal waste landfill
- **Warranty:** valid for the entire service life of the filter:

GENERAL DESCRIPTION:

- **Application:** areas with the highest requirements for air cleanliness (microelectronics, semiconductor manufacturing, healthcare, chemical industry, pharmaceuticals, microbiology, production, etc.)
- **SCAN test on request.**



ABSOLUTE ULPA FILTER U15 (EN 1822)

Product	Width (mm)	Height (mm)	Depth (mm)	Minipleat (mm)	Filter surface (m²)	Airflow (m³/h)	Initial Pressure drop (Pa)	Recom. final diff. pressure (Pa)
305x305x78	305	305	78	50	1,7	100	150	450
305x610x78	305	610	78	50	3,7	220	150	450
457x457x78	457	457	78	50	4	240	150	450
610x610x78	610	610	78	50	7,5	440	150	450
305x305x117	305	305	117	80	2,2	125	150	450
457x457x117	457	457	117	80	5,5	325	150	450
575x575x117	575	575	117	80	9,2	540	150	450
305x610x117	305	610	117	80	4,7	270	150	450
610x610x117	610	610	117	80	10,4	610	150	450